


# Shield Clips

## ■ Features

1. Half-lock structure of the shield clip and shield cover provide high retention force.
2. Improves work efficiency by having a large invitation area of shield clip when inserting a shield case.
3. Has a structure that prevents solder rising.

## ■ Specifications

- Operating Temperature Range : -40°C to +125°C
- Contact Resistance : 30mΩ max.
- Insertion Force : 12 N max.
- Withdrawal Force : 3 N min.
- Durability : 10 times

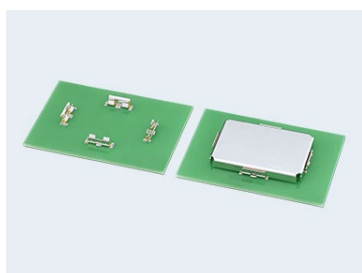

### 415CPB-219-50F

